




# Lumenform

## ELP-FH – Emergency Light Thermoplastic Housing Fixed Heads

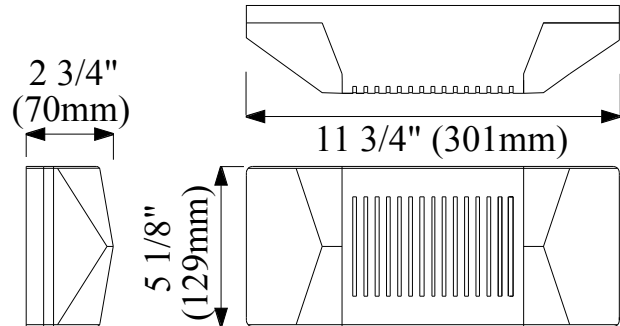

### **DESCRIPTION**

The ELP-FH is an attractive, economical alternative to traditional double headed emergency lighting fixtures. It has an aesthetically appealing low profile and is quick and easy to install.

### **APPLICATION**

Suitable for use in almost any commercial or light industrial application.

### **APPROVALS**

UL924.  
Life Safety NFPA 101.  
UL listed for damp locations use.

### **HOUSING**

The housing is made of injection molded thermoplastic. It has high impact resistance and is UL94-5V rated.

### **MOUNTING**

The back mounting plate is made of injection molded thermoplastic. It has a molded in universal J-Box mounting pattern and keyhole slots. The main housing snaps on to the back plate for quick and easy installation.

### **LENS**

Computer designed optical prisms throw the light outward and to the sides for maximum utilization.

### **ELECTRICAL/BATTERY**

- Dual voltage input 120/277 VAC, 60 Hz.
- Maintenance free, Sealed Lead Calcium 6V, 4.0 AH battery with a maximum full recharge time of 24 hours. Minimum 1 ½ hour emergency operation.
- Low voltage disconnect of the battery prevents deep discharge and maintains good battery life.
- Fully automatic, solid state charger.
- Test switch with LED charge indicator/AC voltage indicator.
- Safety disconnect feature cuts power to the fixture when it is removed from the back mounting plate.
- Line latching feature prevents the unit from turning on during installation to a non-energized AC circuit. Saves labor since the installer does not have to return to connect the battery terminals once the building is energized.

Catalog Number	Description	Heads	Lamp Type	Lamp V DC	Lamp Watts	Weight (Lbs)	Volume (cu. ft.)	Pieces per Skid
ELP-FH	White Housing	Fixed Heads	T-5 Incandescent	6	2 x 5.4	3.3	0.13	576