




**FHM - Floodlight High Wattage
Micro style
Trunnion or Slipfitter Mounting
High Pressure Sodium 150 – 400 W
Metal Halide 175 – 400 W
Metal Halide Pulse Start 200 – 400 W**

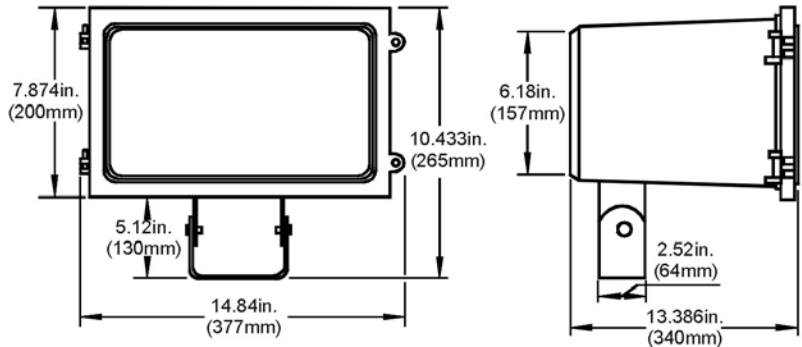

DESCRIPTION

The FHM is a general purpose Floodlight for 250 and 400W lamps in a compact size. It has a wide beam distribution pattern allowing it to be used in almost any floodlighting application. U.L. listed for wet locations.

APPLICATION

Suitable for lighting large open areas such as parking lots, storage yards, construction sites, marinas, industrial areas and around buildings.

HOUSING

The housing is made of high pressure die cast aluminum and finished in a dark bronze polyester powder coat paint finish for lasting corrosion resistance.

BALLAST

High Power Factor, Constant Wattage Autotransformer ballasts. Multi Tap (120/208/240/277V) or 480V ballasts. Minimum starting temperature is -40°F (-40°C) for HPS and -20°F (-30°C) for MH.

SOCKET

Mogul base, 4KV pulse rated porcelain socket.

MOUNTING

Die formed steel trunnion or die cast aluminum slipfitter for use with 2 3/8" - 3" O.D. tenons. Both versions have dark bronze polyester powder coat paint finish.

REFLECTOR

Die formed, anodized aluminum.

GASKET

Silicone rubber for long life.

LENS

Clear tempered glass, impact and heat resistant.

CATALOG NUMBER LOGIC

FHM-

Product Series
FHM = Floodlight
High Wattage
Micro style

MH

Lamp Type
HP = High Pressure
Sodium
MH = Metal Halide
MP = Metal Halide
Pulse Start

400-

Lamp Wattage
(HPS) 150, 250, 400
(MH) 175, 250, 400
(MP) 200, 320, 350, 400

MT-

Voltage
MT = Multi Tap
120/208/240/277V
480V = 480V

TR-

Mounting
TR = Trunnion
SF = Slipfitter

L

Lamp
L = Lamp
Included

OPTIONS

FHM-WG – Wire Guard
FHM-GS – Glare Shield
FHM-VS – Vandal Shield