




**HBT - High Bay Thousand Watt**  
**Metal Halide Pulse Start 750 - 1000 W**  
**Metal Halide 1000 W**  
**High Pressure Sodium 1000 W**

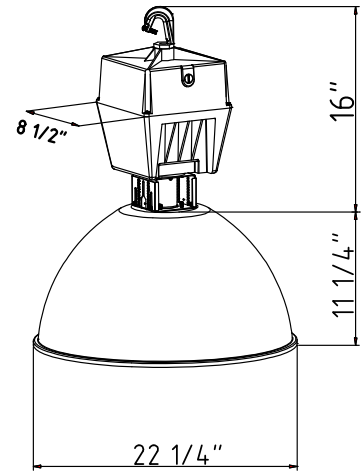

**DESCRIPTION**

The HBT is a versatile High Bay fixture for general purpose industrial lighting needs in up to 1000W applications. U.L. damp location listed.

**APPLICATION**

Suitable for use in factories, warehouses and other areas that have high mounting heights and require large amounts of light.

**HOUSING**

The housing is made of high pressure die cast aluminum and finished in a white polyester powder coat paint finish for lasting corrosion resistance.

**BALLAST**

High Power Factor, Constant Wattage Autotransformer ballasts. Multi Tap (120/208/240/277V) or 480V ballasts. Minimum starting temperature is -20°F (-30°C) for MP and MH, -40°F (-40°C) for HPS.

**SOCKET**

Mogul base, 4KV pulse rated porcelain socket.

**MOUNTING**

Hook with safety screw included.

**REFLECTOR / REFRACTOR**

22" anodized aluminum (shown) or 22" prismatic acrylic. Adjustable positions for choice of distribution patterns.

**CATALOG NUMBER LOGIC**

**HBT-**

**Product Series**  
 HBT = High Bay  
 Thousand  
 Watt

**MH**

**Lamp Type**  
 MP = Metal Halide  
 Pulse Start  
 MH = Metal Halide  
 HP = High Pressure  
 Sodium

**1000-**

**Lamp Wattage**  
 (MP) 750, 875, 1000  
 (MH) 1000  
 (HPS) 1000

**MT-**

**Voltage**  
 MT = Multi Tap  
 120/208/240/277V  
 480V = 480V

**AL22-**

**Reflector**  
 AL22 = Aluminum 22"  
 AC22 = Acrylic 22"

**L**

**Lamp**  
 L = Lamp  
 Included

**OPTIONS**

Q – Quartz restrike system with quartz restrike lamp  
 QT – Quartz restrike system with time delay, with quartz restrike lamp.  
 3CP-XXX – 3 foot Cord and NEMA Plug, XXX = specify voltage, 120 or 277V  
 WG22 – Wire Guard 22"  
 FG22 – Flat Glass 22" with clamp band for mounting. Tempered glass.  
 F1-XXX or F2-XXX – Single or Double Fuse. XXX = specify voltage.  
 SC3 – Safety Cable 3'.