




HBT - High Bay Thousand Watt
Metal Halide Pulse Start 750 - 1000 W
Metal Halide 1000 W
High Pressure Sodium 1000 W
Induction 80 W

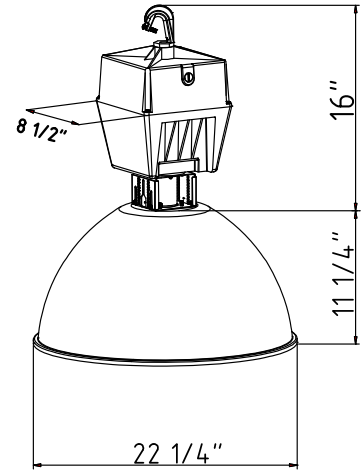

DESCRIPTION

The HBT is a versatile High Bay fixture for general purpose industrial lighting needs in up to 1000W applications. U.L. damp location listed.

APPLICATION

Suitable for use in factories, warehouses and other areas that have high mounting heights and require large amounts of light.

HOUSING

The housing is made of high pressure die cast aluminum and finished in a white polyester powder coat paint finish for lasting corrosion resistance.

BALLAST

High Power Factor, Constant Wattage Autotransformer ballasts. Multi Tap (120/208/240/277V) or 480V ballasts. Minimum starting temperature is -20°F (-30°C) for MP and MH, -40°F (-40°C) for HPS.

SOCKET

Mogul base, 4KV pulse rated porcelain socket.

MOUNTING

Hook with safety screw included.

REFLECTOR / REFRACTOR

22" anodized aluminum (shown) or 22" prismatic acrylic. Adjustable positions for choice of distribution patterns.

CATALOG NUMBER LOGIC

HBT-

Product Series
HBT = High Bay
Thousand
Watt

MH

Lamp Type
MP = Metal Halide
Pulse Start
MH = Metal Halide
HP = High Pressure
Sodium
ID = Induction

1000-

Lamp Wattage
(MP) 750, 875, 1000
(MH) 1000
(HPS) 1000
(ID) 200

MT-

Voltage
MT = Multi Tap
120/208/240/277V
480V = 480V

AL22-

Reflector
AL22 = Aluminum 22"
AC22 = Acrylic 22"

L

Lamp
L = Lamp
Included

OPTIONS

Q – Quartz restrike system with quartz restrike lamp
QT – Quartz restrike system with time delay, with quartz restrike lamp.
3CP-XXX – 3 foot Cord and NEMA Plug, XXX = specify voltage, 120 or 277V
WG22 – Wire Guard 22"
FG22 – Flat Glass 22" with clamp band for mounting. Tempered glass.
F1-XXX or F2-XXX – Single or Double Fuse. XXX = specify voltage.
SC3 – Safety Cable 3'.