




EL  
Eyelid



GR  
Grid



OF  
Open Face

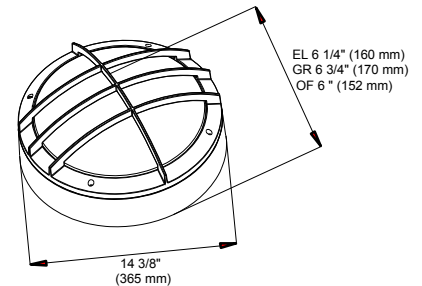

### DESCRIPTION

The WFR series of fluorescent round wallpacks offers an architectural look combined with energy savings in up to Fluorescent quad tube 2 x 42W lamps.

Available in three front face styles:

EL – Eyelid.  
GR - Grid.  
OF - Open Face.

U.L. listed for wet locations.

### APPLICATION

Ideal for security lighting and entranceway lighting around commercial, industrial and residential buildings. The polycarbonate lenses combine vandal resistance with an architecturally pleasing product.

### CATALOG NUMBER LOGIC

**WFR-**

**Product Series**  
WFR = Wallpack  
Fluorescent  
Round

**FL**

**Lamp Type**  
FL = Fluorescent  
quad tube

**242-**

**Lamp Wattage**  
(FL) 226 = 2 x 26W  
232 = 2 x 32W  
242 = 2 x 42W

**UV-**

**Voltage**  
UV = Universal Voltage  
120 – 277 V

**GR**

**Face Style**  
EL = Eyelid  
GR = Grid  
OF = Open Face

**L**

**Lamp**  
L = Lamp  
Included

### OPTIONS

PC-XXX – Button Photocell (XXX = specify voltage)

EM – Emergency ballast for FL versions. Provides 90 minutes of emergency backup power to one lamp.

### HOUSING

The housing is made of high pressure die cast aluminum and finished in a polyester powder coat paint finish for lasting corrosion resistance. Available in dark bronze or white color finishes.

### BALLAST

Electronic ballasts for Fluorescent 2x26, 32 or 42W in Universal Voltage 120 – 277V input.

### SOCKET

Positive latching thermoplastic socket for fluorescent lamps.

### MOUNTING

Knockout pattern provided on back casting for mounting to junction boxes. Two ½" knockouts provided for surface conduit wiring and through wiring.

### REFLECTOR

Die formed, white polyester powder coat painted aluminum.

### GASKET

Silicone rubber for long life.

### LENS

One piece injection molded opal polycarbonate for increased vandal resistance.