



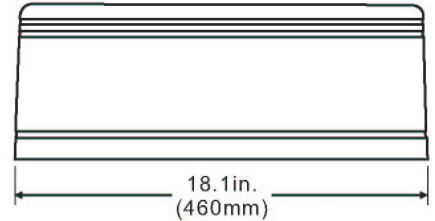

WHR – Wallpack Half Round
Metal Halide Pulse Start 70 – 150 W
High Pressure Sodium 35 – 150 W
Fluorescent Quad Tube 2 x 26 - 42 W
LED 2 – 3 x 15 W



DESCRIPTION

The WHR is an architectural grade full cutoff wall pack for up to Metal Halide Pulse Start 150W, High Pressure Sodium 150W, Fluorescent quad tube 2 x 42W or LED 3 x 15W lamps. Distributions include WT - Wide Throw, FT - Forward Throw and UD - UP and Down. The WT and FT distributions are fully Dark Sky compliant. U.L. listed for wet locations.

APPLICATION

Ideal for security lighting around commercial, industrial and residential buildings where maintaining an esthetically appealing dayform appearance is important.

HOUSING

The housing is made of high pressure die cast aluminum and finished in a textured dark bronze polyester powder coat paint finish for lasting corrosion resistance.

BALLAST

High Power Factor, Constant Wattage Autotransformer ballasts, Multi Tap (120/208/240/277V) or reactor 120V ballasts for HPS. Minimum starting temperature is -20°F (-30°C) for MP, -40°F (-40°C) for HPS. Electronic ballasts for Fluorescent 2x26, 32 or 42W in Dual Tap (120/277V). Multi Tap, electronic drivers for LED.

SOCKET

Medium base, 4KV pulse rated porcelain socket for HID lamps. Positive latching thermoplastic socket for fluorescent lamps.

MOUNTING

Quick Install bracket (see below) makes for fast installations.

REFLECTOR

Die formed, anodized aluminum. Available in three optical distributions.
 WT – Wide Throw
 FT – Forward Throw
 UD – 50% UP and 50% Down

GASKET

Silicone rubber for long life.

LENS

Clear tempered glass, impact and heat resistant.

QUICK INSTALL BRACKET



Level Bubble

Attach Quick Install bracket to wall or junction box.



Slide fixture onto Quick Install bracket and make electrical connections.



Secure fixture to Quick Install bracket with screws.

CATALOG NUMBER LOGIC

WHR-

Product Series
 WHR = Wallpack
 Half
 Round

MP

Lamp Type
 MP = Metal Halide
 Pulse Start
 HP = High Pressure
 Sodium
 FL = Fluorescent
 quad tube
 LD = LED

150-

Lamp Wattage
 (MP) 70, 100, 150
 (HPS) 35, 50, 70,
 100, 150
 (FL) 226 = 2 x 26W
 232 = 2 x 32W
 242 = 2 x 42W
 (LED) 215 = 2 x 15W
 315 = 3 x 15W

MT-

Voltage
 MT = Multi Tap
 120/208/240/277V
 DT = Dual Tap 120/277V
 120V = 120V
 480V = 480V

UD-

Light Distribution
 WT = Wide Throw
 FT = Forward Throw
 UD = Up & Down

L

Lamp
 L = Lamp
 Included