




WPC – Wall pack Perimeter Cutoff
WUDC – Wall pack Up Down Cutoff
 Metal Halide Pulse Start 50 – 100 W
 High Pressure Sodium 35 – 100 W
 Fluorescent Quad Tube 1x26 - 42 W

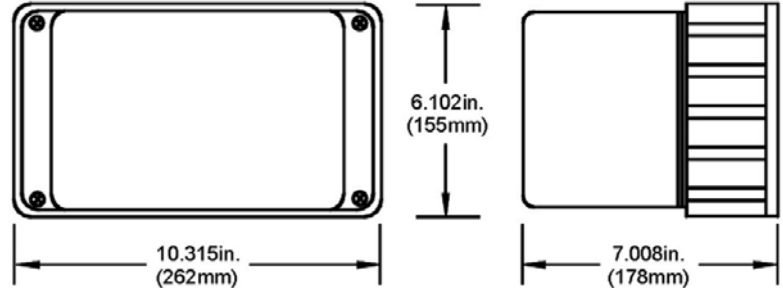

DESCRIPTION

The WPC (shown) is a cutoff wall pack that throws light below and to the sides of the fixture while minimizing glare and light trespass. The WUDC is similar in design but directs light up and down from the fixture while limiting light throw to the sides. U.L. listed for wet locations.

APPLICATION

Ideal for security lighting around commercial, industrial and residential buildings where limiting glare and light trespass are important.

HOUSING

The housing is made of high pressure die cast aluminum and finished in a dark bronze polyester powder coat paint finish for lasting corrosion resistance.

BALLAST

High Reactance, High Power Factor ballasts for MP lamps and Normal Power Factor, Reactor ballasts for HPS lamps. 120V or Dual Tap ballasts.

SOCKET

Medium base, 4KV pulse rated porcelain socket for HID lamps. Positive latching thermoplastic socket for fluorescent lamps.

MOUNTING

Knockout pattern provided on back casting for mounting to junction boxes. Three 1/2" threaded entry hubs provided for top or side conduit wiring and through wiring.

REFLECTOR

Anodized Aluminum.
 WPC – Perimeter Cutoff optics.
 WUDC – Up Down Cutoff optics.

GASKET

Silicone rubber for long life.

LENS

Injection molded polycarbonate lens. UV stabilized.

CATALOG NUMBER LOGIC

WPC-

Product Series

WPC = Wall pack
 Perimeter Cutoff
 WUDC = Wall pack
 Up Down Cutoff

HP

Lamp Type

MP = Metal Halide
 Pulse Start
 HP = High Pressure
 Sodium
 FL = Fluorescent
 quad tube

100-

Lamp Wattage

(MP) 50, 70, 100
 (HPS) 35, 50, 70, 100
 (FL) 126 = 1 x 26W
 132 = 1 x 32W
 142 = 1 x 42W

120V-

Voltage

120V = 120V
 DT = 120/277V

L

Lamp

L = Lamp
 Included