




**WPL - Wall Pack Large**  
**Metal Halide Pulse Start 320 - 400 W**  
**Metal Halide 400 W**  
**High Pressure Sodium 400 W**  
**Induction 80 - 120 W**

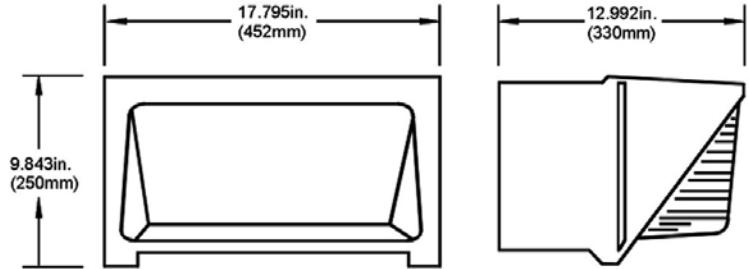

**DESCRIPTION**

The WPL is designed for up to 400W HID lamps or Induction 120W lamps. Its rugged die cast aluminum housing and borosilicate glass lens give it long lasting performance. U.L. listed for wet locations.

**APPLICATION**

Ideal for security lighting around commercial, industrial and residential buildings where higher mounting heights are available and a large area needs to be lit.

**HOUSING**

The housing is made of high pressure die cast aluminum and finished in a dark bronze polyester powder coat paint finish for lasting corrosion resistance.

**BALLAST**

High Power Factor, Constant Wattage Autotransformer ballasts, Multi Tap (120/208/240/277V). Minimum starting temperature is -20°F (-30°C) for MP and MH, -40°F (-40°C) for HPS.

**SOCKET**

Mogul base, 4KV pulse rated porcelain socket.

**REFLECTOR**

Die formed, anodized aluminum.

**GASKET**

Silicone rubber for long life.

**LENS**

Prismatic borosilicate glass, impact and heat resistant. The door assembly holding the lens is secured with a stainless steel chain to ensure easy relamping without lens breakage.

**CATALOG NUMBER LOGIC**

**WPL-**

**Product Series**  
WPL = Wall Pack Large

**MP**

**Lamp Type**  
MP = Metal Halide Pulse Start  
MH = Metal Halide  
HP = High Pressure Sodium  
ID = Induction

**400-**

**Lamp Wattage**  
(MP) 320, 350, 400  
(MH) 400  
(HPS) 400  
(ID) 80, 100, 120

**MT-**

**Voltage**  
MT = Multi Tap  
120/208/240/277V  
480V = 480V

**L**

**Lamp**  
L = Lamp Included

**OPTIONS**

WPL-WG – Wire Guard for WPM or WPL fixture.  
WPL-GS – Glare Shield for WPM or WPL fixture.  
WPL-VS – Vandal Shield for WPM or WPL fixture.  
PC-XXX – Button Photocell (XXX = specify voltage).